

**TECHNICAL PROGRESS.
SERVICE EVOLUTION.**
Engineered since 1950.



velyen licensed by **ISTOBAL**
Automotive Lifting Quality



Visit us at www.velyen.com

► **CATALOGUE ICONS**
LOOK UP THESE STAMPS
IN THE CATALOGUE



SAFETY REGULATIONS

Products homologated and certified according to the new European Directive 2006/42/CE and Harmonized Standards EN 1493:2010.



THE BEST CHOICE

- Search this label to find our more competitive products, high-range equipment for higher performance and satisfaction throughout their life.



BEST

- This icon indicates the best sellers

INDEX

AFTER-SALE & SPARES SERVICE



4-5

LUBRICATION EQUIPMENT



9-11

2-POST LIFTS



12-17

4-POST LIFTS



19-21

DOUBLE SCISSOR LIFTS



22-23

LONG PLATFORM SCISSOR LIFTS



26-27, 37

COMMERCIAL VEHICLES LIFTS



28

MOBILE COLUMNS LIFTS



29

PARKING LIFTS



30

IN-GROUND PISTON LIFTS



31

MOTORBIKE & QUAD LIFTS



32

INSPECTION EQUIPMENT



33-35

► EXPORTS

WE ARE A GLOBAL
COMPANY

► EXPORTS

50%

A half of our production
is exported

► COUNTRIES

42

Velyen is present in more than 33
countries

► INTERNATIONAL SUBSIDIARIES


3



Velyen Automechanika 2014

Subsidiaries in Argentina, Mexico
and United Kingdom

WE CARE AFTER SALES

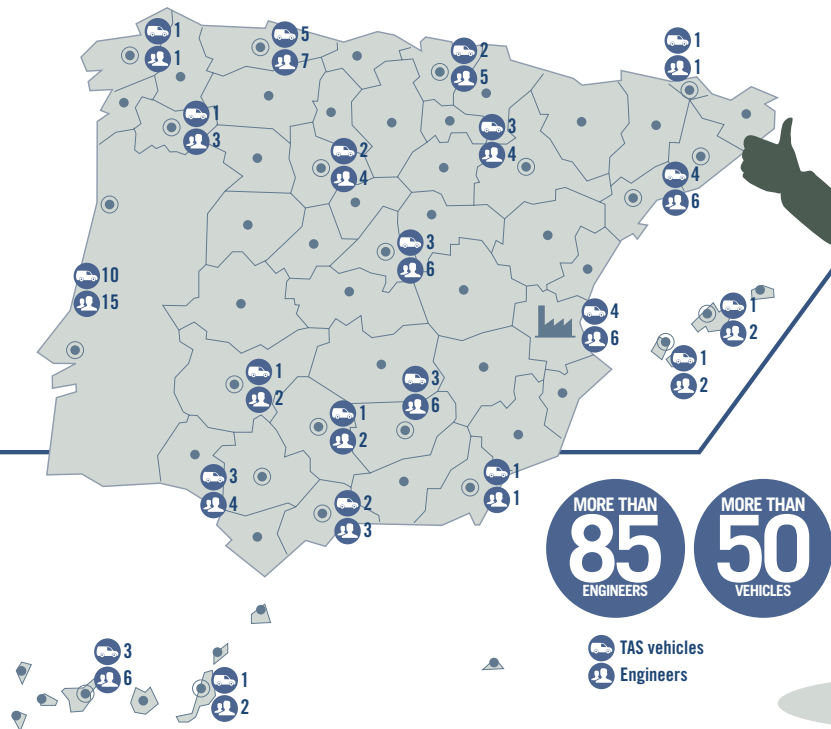

Guaranteed spare parts for the lifetime the equipment

Regulatory Compliance and Advisory

velyen licensed by **ISTOBAL**

Engineered since 1950

We can provide a complete service.

Stop wasting money on oil changes

Save money thanks to Velyen's management system



1,5 lifts x mechanic = 30% turnover




Increase an average of €125 per customer thanks to the active reception.




Workshops with no alignment machine lose money and customers for not giving a complete service.

Equipment repaid over 3 months.

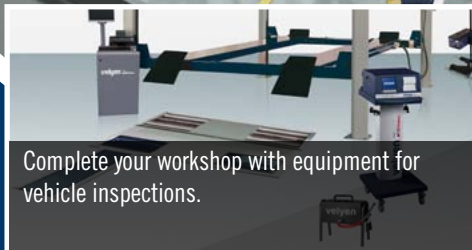

Complete your workshop with equipment for vehicle inspections.

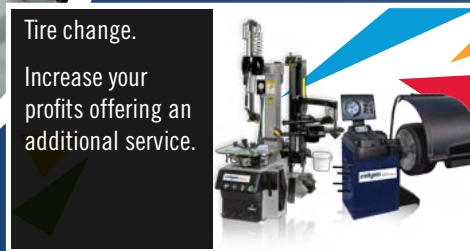

Tire change.

Increase your profits offering an additional service.

► HOW TO EQUIP A COMPLETE WORKSHOP AT COMPETITIVE PRICES

Control your EXPENSES, with Premium equipment and little investment.



Profit

Equipment included in a weekly investment of €190

- 4 Premium lifts
- 1 Tire changer with helper arm (Run Flat)
- 1 wheel balancer
- 1 3D Aligner
- 3 Waste oil drainers
- 1 Mobile oil supply equipment
- 1 Mobile exhaust equipment

You can have all the products to equip a professional workshop at a predetermined and easy to monetize cost.

INVESTMENT
22.900€

RETAIL PRICE
30.000€



Automotive Lifting Quality

► DIFFERENT PRODUCT RANGES ACCORDING TO YOUR NEEDS

Istobal, Velyen's precedent as a specialist manufacturer since 1950.

Velyen designs and manufactures lifts and lube equipment.

Also sells OEM to equip a workshop with complete equipment such as mot bays, tire changers, wheel balancers, aligners, exhaust gas extraction, etc.

Velyen, manufacturer and aftersales reference in Spain.



Saving, a must.


Discover our solutions in vehicle lifts, assembled in Valencia, SPAIN, which meet the highest standards of current CE, the best price and a regular production .




► VelyenPremium

Latest design and technology

Take advantage of more than 60 years of experience in premium components and a high level of excellence and performance..

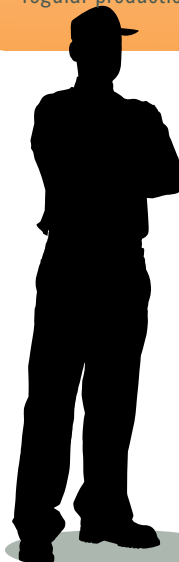

Manufacture Video

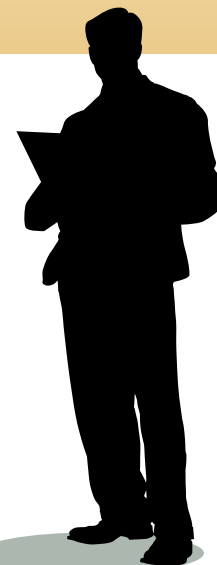



Did you know that you could save more than you imagined thanks to a lubrication management system?

Stop wasting money with the solutions offered by VELYEN:

- **Reduced purchasing costs**
- **Computerized control of each supply**
- **No more cans**
(+ savings + cleanliness)
- **Agility and speed**

AMORTIZATION OVER 15 DAYS

EXAMPLE OF CONSUMPTION


Option	Price / Litre	15,000 L/Year	40,000 L/Year
4L Can	3,50 €	52.500 €	140.000 €
1,000L Tank	2,70 €	40.500 €	108.000 €
SAVING		12.000 €	32.000 €

*Average oil price Top sellers

Find how in the following pages ►

TURNKEY INSTALLATION

Installation example, ask for a quote

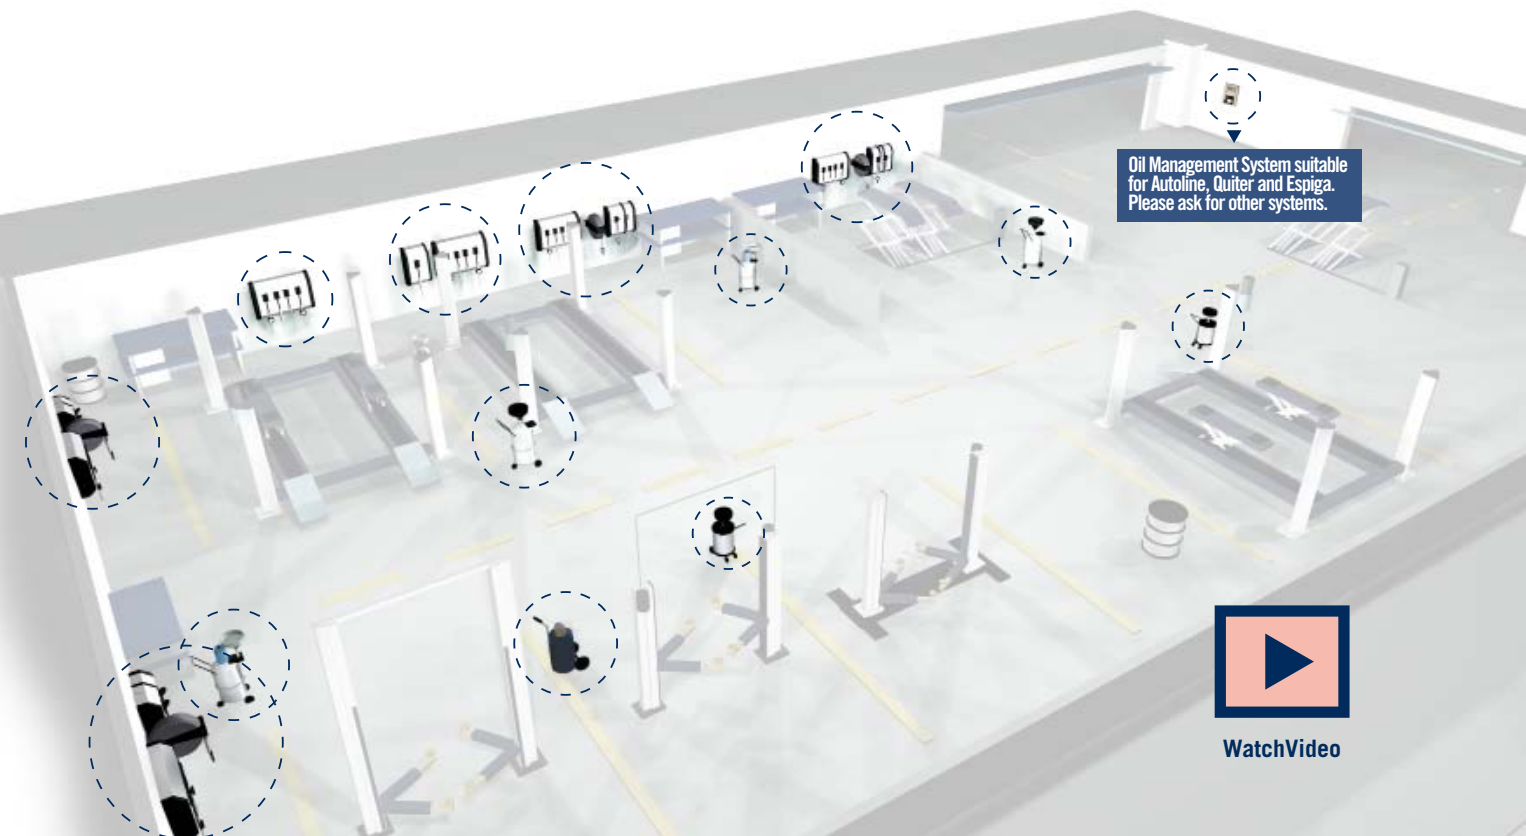

Oil Management System suitable for Autoline, Quiter and Espiga. Please ask for other systems.



WatchVideo



BEST SELLER



BEST SELLER



BEST SELLER



► 5010190

Suction / Drainer unit 90 litres

- Mobile equipment
- Tank capacity of 90 l.
- Pressure control valve
- Extraction capacity of 60 l.
- Tank drain is operated pneumatically.

Advantages:

- Quick suction
- Extraction of oil by gravity or suction
- Cleaner and more efficient collection
- 5010190/K:



► 4LM0010

Mobile oil dispenser for 208 L tank, trolley, pump & digital gun

- Oil Pump 3:1.
- Tank Trolley.
- 4 m Hose.
- Digital Oil Gun.



► 4LM0050

Oil dispenser set for 1.000 L tank, open hose reel, anti-drip tray, pump & digital gun.

- Oil dispenser set with wall-bracket and 10 m hose reel for 1.000l tanks.
- Pneumatic pump 3:1 with air maintenance unit (manometer/lubricator with fitter) SAE 240 digital gun, 1m air hose and 2x2 oil hoses.
- Maximum flow 22 l/min.

You know what the professionals think?



Disadvantages narrow lifts




Advantages Velyen lifts



Advantages 4EC1800

velyen


OTHER BRANDS

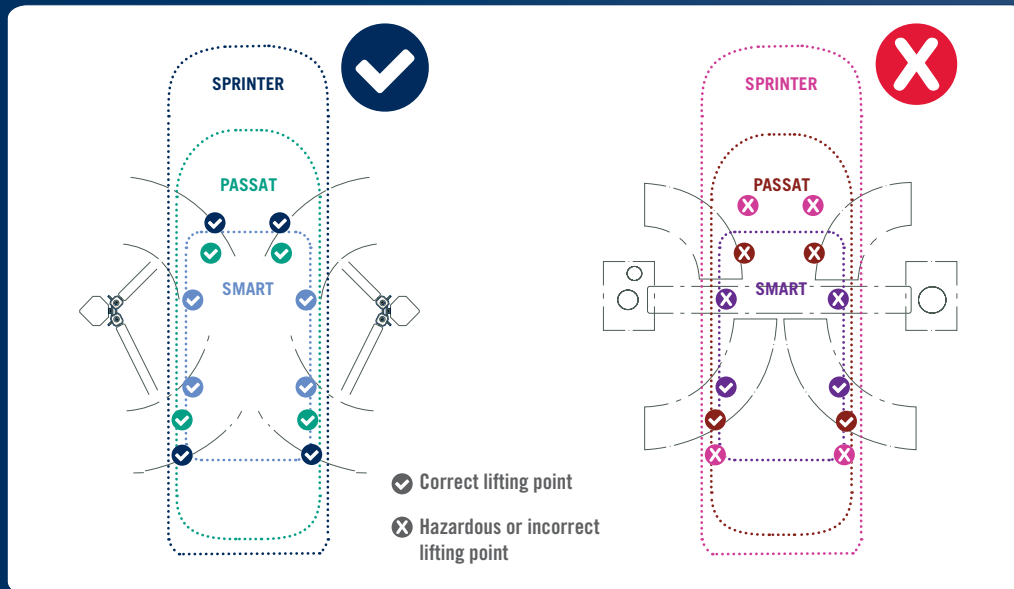

► 4EB1700: The new electromechanical lift with base

For decades electromechanical lifts have been the favourite lifts for those seeking a reliable and longlasting equipment in the workshop.

Originally launched in 1964 as the successor of Istobal 42700, the new 4EB1700 model is, no doubt, one of the most reliable lifts ever made.

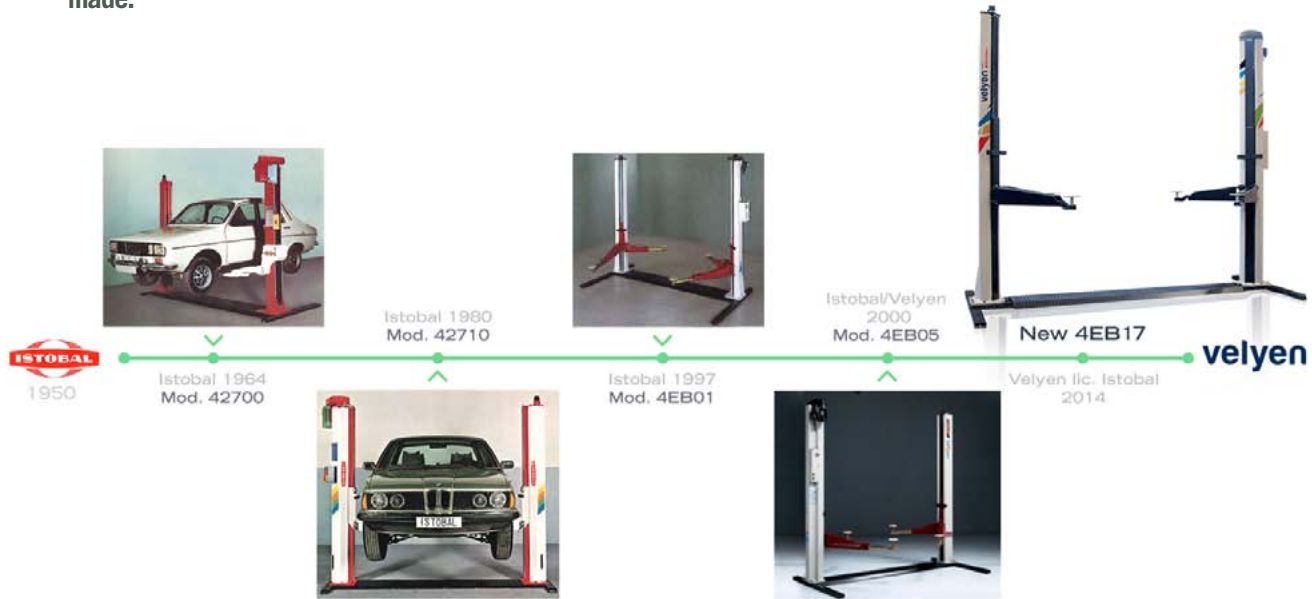

ACCESSORIES FOR 2 POST-LIFTS 4EC1800 Y 4EB1700



► 4360000

Special Pad 24 cm




► 4301000

SafetyPad



► 990800 / 990700

Pad 80 mm
Pad 130 mm



► 4303300

Total LED lighting



► 4302500 / 990200

ExpressPad Arms 4EB1700 / 4EC1800



Portable single H base



MOST VERSATILE



BEST SELLER



► 4EC1800

SCS
TECHNOLOGY

Electromechanical 2-Post Lift Baseless 3500 Kg
Electronic Synchronization: Possibly the world's most versatile lift

TECHNICAL DATA

Width between columns	2700 mm
Load capacity	3500 Kg
Minimum height	95 mm
Lifting height	2000 mm
Lifting time	45"
Arm length (min-max)	Short 620-1240 mm Long 925-1540 mm
Overall width	3490 mm
Column + Overhead conduit height	4040 mm
Motor	3 Phase 230/400 V 50/60 Hz. 2 x 2.4 KW

· Optional 925-1500 mm arms kit Mod.4300600



BEST SELLER



► 4EB1700



Electromechanical 2-Post Lift W/Base 3200 Kg

TECHNICAL DATA

Width between columns	2500 mm
Load capacity	3200 Kg
Minimum height	100 mm
Lifting height	1945/2000 mm
Lifting time	60"
Arm length (min-max)	Short 500-900 mm Long 800-1250 mm
Overall width	3190 mm
Motor	3 Phase 230/400 V 50/60 Hz. 2.4 KW

- Optional Single Phase 4EB1700/2 (2,8T)
- Optional 800-1250 mm arms kit



► 4EC1300



Hydraulic 2-Post Lift Baseless 4000 Kg Automatic

TECHNICAL DATA

Width between columns	2950 mm
Load capacity	4000 Kg
Minimum height	90 mm
Pad extensions height	100 mm
Lifting height	1900 mm
Crossbar height (ind. - out.)	3950-4085 mm
Lifting time	45"
Arm length (min-max)	740-1150 mm / 890-1390 mm
Overall width	3540 mm
Motor	3 Phase 230/400 V 50/60 Hz. 2.2 KW

- Optional Single Phase 4EC1300/2
- Optional 890-1390 mm arms kit Ref. 4304400
- Latam Version 4EC1300/AX autom. / 4EC1300/X manual



► 4EC1400



Hydraulic 2-Post Lift Baseless 5000 Kg Automatic

TECHNICAL DATA

Width between columns	3090 mm
Load capacity	5000 Kg
Minimum height	90 mm
Pad extensions height	90/160 mm
Lifting height	1900 mm
Crossbar height (ind. - out.)	4920-5050 mm
Lifting time	70"
Arm length (min-max)	890-1800 mm
Overall width	3840 mm
Motor	3 Phase 230/400 V 50/60 Hz. 2.2 KW



Hydraulic 2-Post Lift With Semi-Base 4000 Kg

TECHNICAL DATA

Width between columns	2850 mm
Load capacity	4000 Kg
Minimum height	90 mm
Pad extensions height	90/140 mm
Lifting height	1930 mm
Lifting time	45"
Arm length (min-max)	740-1150 / 890-1390 mm
Overall width	3430 mm
Motor	3 Phase 230/400 V 50/60 Hz. 2.2 KW

· Optional Single Phase 4EB1000A/2



**Hydraulic 2-Post Lift With Semi-Base 3200 Kg
Manual unlocking**

TECHNICAL DATA

Width between columns	2850 mm
Load capacity	3200 Kg
Minimum height	90 mm
Pad extensions height	90/140 mm
Lifting height	1930 mm
Lifting time	45"
Arm length (min-max)	740-1150 / 890-1390 mm
Overall width	3430 mm
Motor	3 Phase 230/400 V 50/60 Hz. 2.2 KW

· Optional Single Phase 4EB0900/2K

► **AFTER-SALE SERVICE AND SPARES PARTS**

DO YOU KNOW ALL THE ADVANTAGES OF VELYEN PARTS?



ADVANTAGE 1

VELYEN spare parts have lower price

RETAIL PRICE 2015

GREASE

1556400 9,50 euros

001259 4,40 euros

PADS

0720300 10,95 euros

1304800 11,95 euros

MAIN AND SAFETY NUTS

0922700 115 euros

2782400 115 euros

LOCKING SYSTEMS

1347300 112 euros

0722500 80 euros



ADVANTAGE 2

VELYEN spare parts are approved and meet mandatory safety regulations



ADVANTAGE 3

VELYEN spares increase the life of your equipment



ADVANTAGE 4

The supply of VELYEN spare parts is guaranteed, even for older lifts



ADVANTAGE 5

We have the largest network of after-sale specialists in Spain looking after your workshop



► 4ED0300

► 4ED0400

► 4ED0600



Hydraulic 4-Post Lift 100% Automatic Release No compressed Air Required

TECHNICAL DATA	4ED0300	4ED0400 ☆	4ED0600 ☆
Load capacity	3500 Kg	4000 Kg	5000 Kg
Platform lengths	4370 mm	4450 mm	5230 mm
Platform widths	450 mm	560 mm	580 mm
Width between columns	2670 mm	2670 mm	2900 mm
Distance between platforms	800-1235 mm	690-1015 mm	800-1210 mm
Minimum height	190 mm	150 mm	150 mm
Lifting height	1700 mm	1700 mm	1800 mm
Lifting time	30"	30"	45"
Overall length	5380 mm	5150 mm	5950 mm
Overall width	3035 mm	3035 mm	3265 mm
Motor	3 Phase 230/400 V 50/60 Hz. 2.2 KW	3 Phase 230/400 V 50/60 Hz. 2.2 KW	3 Phase 230/400 V 50/60 Hz. 2.2 KW

· Optional Single Phase 4ED0300/2

· Optional Single Phase 4ED0400/2 / 4ED0600/2



TECHNICAL DATA

· Optional Single Phase 4ED0400N/2

Load capacity	4000 Kg
Platform lengths	4450 mm
Platform widths	560 mm
Width between columns	2900 mm
Distance between platforms	690-1245 mm
Minimum height	150 mm
Lifting height	1800 mm
Lifting time	45"
Overall length	5150 mm
Overall width	3265 mm
Motor	3 Phase 230/400 V 50/60 Hz. 2.2 KW



TECHNICAL DATA

4ED1400


4ED1600

Load capacity	4000 Kg	5000 Kg
Platform lengths	4520 mm	5700 mm
Platform widths	560 mm	630 mm
Width between columns	2450 mm	2650 mm
Distance between platforms	655-850 mm	550-880 mm
Minimum height	150 mm	150 mm
Lifting height	1800 mm	1800 mm
Lifting time	45"	45"
Overall length	5320 mm	6470 mm
Overall width	2800 mm	3000 mm
Motor	Trifásico 230/400 V 50/60 Hz. 2.2 KW	

- MOT version (L) includes: play detector, turnplates, pedal depressor and mirrors
- Optional Single Phase 4ED1400/2 4ED1600/2

ACCESSORIES WHEEL ALIGNMENT

Standard lift suitable also for wheel alignment thanks to optional accessories

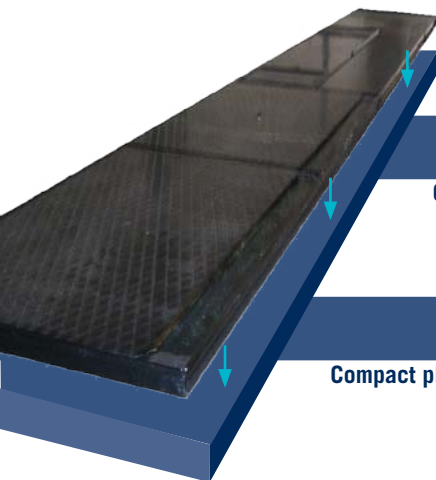


► 994900

Compact platform alignment
for 4ED0400 / 4ED0400N

► 999992

Compact platform alignment
for 4ED0600

► 1596100 x 2 unit

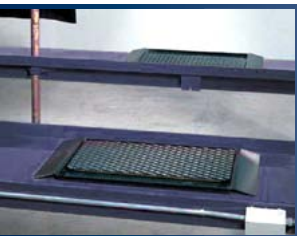

USABLE AREA
374x630x16 mm

Slimline platform 16mm for
4ED0300

► 4661600

USABLE AREA
374x630x45 mm

Non-integrated platform alignment
for 4ED0300

USABLE AREA
560x1620x45 mm


Non-integrated platform alignment
for 4ED0600

► 4249000* / 4249200**

Jacking beam 2T for
*4ED0400 / 4ED0400N / 4ED1400
**4ED0300 / 4ED0600



LED Lighting Equipment



► 992201


Play detector
for 4ED1400 / 4ED1600



► 4661800

Freewheel platform for 4ED0600

► 4661900

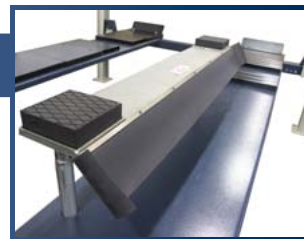



► 4EE1150/2



Double Scissor Lift 2800 Kg - Low Profile: 105 mm
Optional mobility

TECHNICAL DATA

Load capacity	2800 Kg.
Platform lengths	1420-2025 mm
Platform widths	460 mm
Minimum height	105 mm
Maximum lifting height	1000 mm
Distance between platforms	830 mm
Overall length	2025 mm
Overall width	1955 mm
Motor	Single Phase 230 V 50/60 Hz. 2.2 KW

· Mobility Kit ref. 4662400

► 4EE1300 / 4EE1400

Performs automatic bleeding in two easy steps

1



Press the UP button to raise both platforms at maximum height

2



Simultaneously press the UP button and the off-photocell button for 3 minutes to complete the purge of the hydraulic circuit



► 4EE1300

► 4EE1400



Double Scissor Lift 3500 Kg / 3200 Kg
Low Profile: 105 mm · Automatic Bleeding

TECHNICAL DATA	4EE1300	4EE1400
Load capacity	3500 Kg.	3200 Kg.
Platform lengths	1500-2080 mm	1500-2080 mm
Platform widths	635 mm.	635 mm.
Minimum height	105 mm	105 mm
Maximum lifting height	1860 mm	1860 mm
Distance between platforms	720 mm	720 mm
Overall width	1990 mm.	1990 mm.
Motor	3 Phase 230/400 V 50/60 Hz. 2.2 KW	3 Phase 230/400 V 50/60 Hz. 2.2 KW

**AUTOMATIC
LOWERING.
IDEAL FOR
MOTOR
REPAIRS**

AUTO


- Optional Single Phase 4EE1300/2 y 4EE1400/2
- Optional in-ground installation ramp supplements ref. 992500



Did you know that accidents in workshops are above average and you can prevent it?

The main causes are:

- Failure to Prevent
- Lack of Training
- Lifts that do not meet current safety standards.

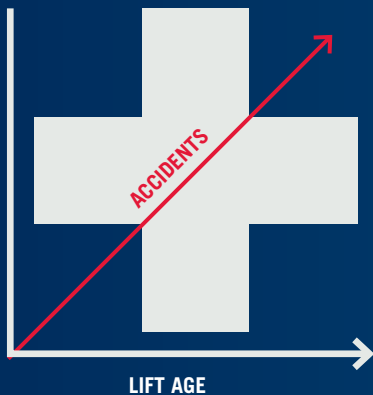

Solutions that Velyen offers:

- Maintenance service
- Continuing training
- Our products meet the new European Machinery Directive 2006/42/CE and Harmonized Standards EN 1493:2010





Did you know that a workshop with 1.5 lifts per technician have a turnover of 30% higher than the rest?



Find out in the following pages ►



► 4EE0700H

► 4EE2400

► 4EE2600



High Raise Scissor Lift 4000 Kg / 4000 Kg / 5000 Kg

TECHNICAL DATA	4EE0700H	4EE2400*	4EE2600*
Load capacity	4000 Kg	4000 Kg	5000 Kg
Platform width	665 mm	665 mm	665 mm
Platform length	5030 mm	4500 mm	5030 mm
Distance between platforms	920 mm	820 mm	820 mm
Lifting Height	2160 mm	2160 mm	2160 mm
Platform design	Flat platforms	Sliding rear platforms and recesses for turning plates	Sliding rear platforms and recesses for turning plates
Minimum height	330 mm	330 mm	330 mm
Motor	3 Phase 230-400V 50/60 Hz. 2.2 KW	3 Phase 230-400V 50/60 Hz. 2.2 KW	3 Phase 230-400V 50/60 Hz. 2.2 KW

· Optional Jacking Beam 2T

· *MOT version (L) includes: play detector, turnplates, pedal depressor and mirrors



► 4EE0535

► 4EE0505H

► 4EE0500H

► 4EE0600H



Scissor Lift For Wheel Alignment 4000 Kg / 5000 Kg Free Wheels Service

TECHNICAL DATA	4EE0535 EXTRA-SLIM	4EE0505H	4EE0500H ☆	4EE0600H
Load capacity	4000 Kg	4000 Kg	4000 Kg	5000 Kg
Platform width	660 mm	610 mm	620 mm	620 mm
Platform length	4200 mm + 1180 mm ramp	4500 mm	5030 mm	5030 mm
Distance between platforms	800 mm	820 mm	920 mm	920 mm
Lifting Height	1880 mm	2160 mm	2160 mm	2160 mm
Minimum height	200 mm	330 mm	330 mm	330 mm
Motor	3 Phase 230-400V 50/60 Hz. 2.2 KW			3 Ph. 230-400V 50/60 Hz. 5 KW

AUXILIARY LIFT

Load capacity	3500 Kg	3500 Kg	3500 Kg	3500 Kg
Platform length	1450 mm	1400 mm	1630 mm	1630 mm
Platform width	610 mm	570 mm	570 mm	570 mm
Lifting height	450 mm	450 mm	450 mm	450 mm

· Optional ramps ref. 993600

· Optional Single Phase 4EE0505H/2 4EE0500H/2



► 4ED0700N



Hydraulic 4-Post Lift 12000 Kg / 25000 Kg No compressed Air Required

TECHNICAL DATA	4ED0700N	4ED0800
Load capacity	12000 Kg	25000 Kg
Platform lengths	6220 mm	8000 mm
Platform widths	710 mm	810 mm
Width between columns	3265 mm	3500 mm
Distance between platforms	780-1150 mm	1000 mm
Minimum height	220 mm	240 mm
Lifting height	1660 mm	1540 mm
Lifting time	65"	90"
Overall length	7150 mm	9576 mm
Overall width	3735 mm	4269 mm
Motor	3 Phase 230/400 V 50/60 Hz. 3 KW	3 Phase 230/400 V 50 Hz. 5.5 KW



► 4ED0800



Watch Video

► 5251600



**Oleoneumatic 10/7Tn
jacking beam for
4ED0700N**

· Op. Total LED lighting ref. 4301700

► 5252000

**Oleoneumatic 10/7Tn
jacking beam for
4ED0800**



· Op. Total LED lightin ref. 4301800

· Op. platform extension 1,2m for 4ED0800 ref. 4303100



► 4EF0050

► 4EF0100

► 4EF0300



Watch Videos



Optional WIRELESS

Mobile Column Lift 5500 Kg. (Mod. 4EF0050 / 55) · 7500 Kg. (Mod. 4EF0100 / 200) · 8500 Kg. (Mod. 4EF0300 / 400)

- Electro-hydraulic columns.
- Lifting configurations:
 - 4-column set: 1 main + 3 slaves (Mod. 4EF050 / 4EF0100 / 4EF0300)
 - 6-column set: 1 main + 5 slaves (Mod. 4EF055 / 4EF0200 / 4EF0400)
 - Available till 8-column set
- Interconnecting cables from column to column around the vehicle in a cable circuit with one open end to drive in/out.
- Adjustable wheel forks from 380 to 620 mm.
- Each slave column is equipped with interconnecting cable with plugs at both ends.
- The control system "SCS" guarantee a perfect and smooth synchronization of the lifting columns without speed variations and a continuous monitoring of all functions.

- Optional wireless remote control.
- Individual hydraulic arm on each column permits an easy and quick position.
- Lifting columns can be operated separately or as a set.
- Safety system against obstacles.
- Mechanical upper limit stop to protect the piston travel.
- Flow valve to control the lowering speed.
- Safety valve against over-pressure..
- **Optional set 4 axle stands 8,5 Tn ref. 462000**
- **Optional wheel free cross beam ref. 462100**
- **Mod. 4EF0055 / 4EF0200 / 4EF0400**



MULTIPLY THE CAPACITY OF YOUR PARKING IN AN EASY, ECONOMIC AND FITTED TO YOUR NEEDS WAY.

Solve your problems of lack of space with the new range of Velyen parking lifts.

TECHNICAL DATA	4EP 2,7 Tn	4EP 2,3 Tn	4EP 2,0 Tn Flexible
Maximum lifting height (A)	3500 mm	3500 mm	1850 mm
Overall height Elevación (F)	2100 mm	2100 mm	1600 mm
Minimum height Elevación (F)	110 mm	110 mm	110 mm
Overall width (B)	2550 mm	2555 mm	2595 mm
Platform width (G)	2100 mm	2100 mm	2100 mm
WIDE entre columnas (E)	2385 mm	2385 mm	2495 mm
Long Total Plataforma (C)	4105 mm	4105 mm	3605 mm
Capacidad Máxima	2700 Kgs.	2300 Kgs.	2000 Kgs.
Motor	230/400V. 2,2 Kw.	230/400V. 2,2 Kw.	230/400V. 1,5 Kw.
Column Sharing	YES	YES	NO
	-	-	-



Watch Video

AND NOW OUR NEW RANGE OF IN-
GROUND PISTON LIFTS THANKS
TO OUR JOINT-VENTURE WITH
HERRMANN 

velyen





► 4EM0110



Pneumatic Motorbike Lift 450 Kg

- Manual control of lowering speed.
- High quality cylinder operated with compressed air.
- Lifting time 3-8 sec.
- Lowering safety control system.
- Locking system at different heights.
- Safety chain for front wheel included.



► 4EM0300/2



Hydraulic Motorbike Lift 500 Kg

- Mobile equipment that can be easily displaced thanks to its support wheels.
- Manual lowering speed control.
- High quality hydraulic cylinder.
- Lifting speed 20 seconds.
- Lowering safety control system.
- Anchoring System at different heights included.
- Safety chain for the front wheel of the bike



Watch Video



► 4EM0400/2 MOT



Motorbike and Quad Lift MOT 600 Kg

- Solid and resistant platform up to 600 Kg.
- Sliding ramps for in-ground and surface installation.
- Lowering security system.
- Locking system at different heights.
- Corrugated anti-slippering ramps.
- Drilled platform for vehicle.
- Optional wheel locking.
- Highly stable platform.
- ON / OFF push button with emergency stop.
- Lowering acoustic warning

MOT EQUIPMENT



- Velyen offers you the most complete range of MOT equipment manufactured in Spain according to the highest UK Standards



**DOWNLOAD
MOT BROCHURE**



MOT EQUIPMENT




- Results of investment on MOT.
Data from official workshops



30
VEHICLE
FAULTS

A large dark blue arrow points from the right side of the '60' infographic to the '30' infographic.

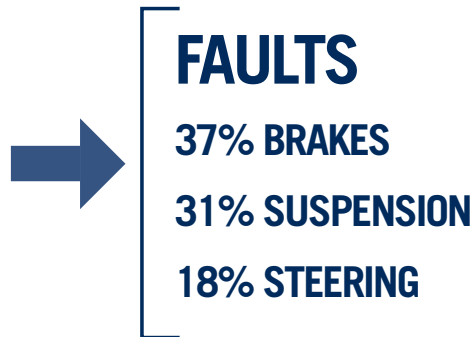

► INVEST IN MOT BUSINESS



Scissor Lift 4500 Kg MOT Special
with 1 front and 2 rear hydraulic detectors

TECHNICAL DATA

Load capacity	4000 Kg
Platform width	620 mm
Platform length	5030 mm
Distance between platforms	920 mm
Lifting Height	2160 mm
Minimum height	330 mm
Motor	3 Phase 230-400V 50/60 Hz. 2.2 KW



ISO 9001

BUREAU VERITAS
Certification



SPAIN

Parque Industrial Ciudad de Carlet
C/ Camino del Carrasqueral, Nº 6
46240 Carlet - Valencia (SPAIN)
T(+34)962543073 **Fx**(+34)962543074
EMAIL comercial-sat@velyen.com

UK

PO Box 1032
Wroxham · Norwich · NR12 8WH
P 01603 781999 · **M** 07971 836680
Fax 01603 889009
EMAIL export.a@velyen.com

MÉXICO

Boulevard Córdoba - Fortín Km 335
94540 Córdoba - Veracruz (México)
T (+52) 2717165599
EMAIL director@velyen.com.mx

ARGENTINA

Arturo Orgaz 1170
Villa Paez CP 5003
Córdoba (Argentina)
T (+54) 351 3379290
T (0351) 489 0900 int 118
EMAIL export.c@velyen.com

www.velyen.com